



Bobcat®

SKID STEER LOADERS S570



One Tough Animal®

S570 — SPECIFICATIONS

Performance

Tipping load (ISO 14397-1)	1888 kg
Rated operating capacity (ISO 14397-1)	944 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range - option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

Engine

Make / Model	Kubota / V2607-DI-T-E3B-BC-2
Fuel	Diesel
Cooling	Liquid
Maximum power at 2700 RPM (SAE J1995)	45.5 kW
Torque at 1425 RPM (SAE J1995 Gross)	201.0 Nm
Number of cylinders	4
Displacement	2600 cm ³
Fuel tank	93.70 L

Weights

Operating weight	2900 kg
Shipping weight	2560 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---


Standard Features

Standard Seat	Lift arm support
Automatically activated glow plugs	Work lights, front and rear
Auxiliary hydraulics: variable	Parking brake
Bob-Tach™ frame	Seat belt
Bobcat Interlock Control System (BICS)	Seat bar
Standard Cab	Spark arrestor muffler
Electrically activated proportional front auxiliary hydraulics Engine/hydraulics system shutdown	10 x 16.5, 10-ply, Heavy duty tyres
Manual	EAC certification

Options

High-Flow hydraulics	2 Speed
Deluxe instrument panel	Air ride seat with 2 point seat belt
Power Bob-Tach™	Back-up alarm
Deluxe pressurized cab with heating	Beacon
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Bucket positioning valve
10 x 16.5, 10-ply, Severe duty tyres	Engine block heater
12 x 16.5, Solid flex tyres	Fire extinguisher
31 x 12-16.5, 10-ply, Superflotation tyres, offset rims	Radio
Advanced Control System (ACS)	Road kit
Selectable Joystick Controls (SJC)	Strobe
Hydraulic bucket positioning (including ON/OFF switch)	

Dimensions

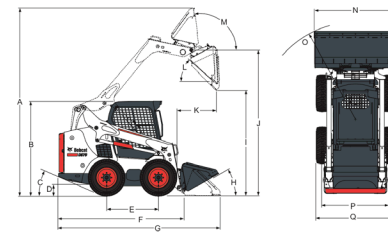

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1970.0 mm	(K)	828.0 mm
(C)	24.2°	(L)	42.0°
(D)	185.0 mm	(M)	97.0°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30.0°	(Q)	1643.0 mm
(I)	2319.0 mm		

Attachments

Angle Brooms	Pallet Fork Accessories
Auger Accessories	Pallet Forks, Hydraulic
Augers	Planer Accessories
Backhoes	Planers
Bale Forks	Root Grapples
Box Blades	Rotary Grinders
Breaker Accessories	Scarifiers
Breakers	Scrapers
Brushcat™ Rotary Cutters	Skeleton Buckets
Brush Saws	Snow & Light Material
Combination Buckets	Buckets
Concrete Mixers	Snow Blades
Concrete Pumps	Snow Pushers
Construction / Industrial Buckets	Snow V-Blades
Diggers	Sod Layers
Dozer Blades	Soil Conditioners
Drop Hammers	Spreaders
Dumping Hoppers	Steel Tracks
Fertilizer and Grain Buckets	Stump Grinders
Flail Cutters	Sweepers
General Purpose (GP)	Tillers
Bucket	Tilt-Tatch
Graders	Tree Transplanters
Grapples, Industrial	Trench Compactors
Landplanes	Trenchers
Landscape Rakes	Utility Forks
Laser Equipment	Vibratory Rollers
Low Profile Buckets	Wheel Saws
Miscellaneous	Whisker Brooms
Mixing Buckets	Wood Chippers
Mowers	

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.



الشركة العامة للمعدات والتجارة
General Trading & Equipment Co.

www.gte.sa

Tel: 920003001

info@gte.sa

P.O. Box 867, Khobar 31952, Saudi Arabia

KHOBAR RIYADH JEDDAH MAKKAH MADINAH KHAMIS MUSHAIT JUBAIL