

Applications

Construction

Main features

All pump components are guarded and easily accessible for adjustment and service. Protects underground utilities from large concrete trucks. Control panel swivels for convenient operation from either side of pump. Keeps concrete trucks off driveways and sidewalks; prevents ruts in soft ground. Protective guard panel strains larger objects from concrete mix. Hose can be routed through small openings, under decks, through bushes, across rivers, either left or right. Attach-plates on both sides of pump make it easy to position in tight spots for either left or right-hand delivery. Attach-plates on both sides of pump make it easy to position in tight spots for either left or right-hand delivery.


Compatibility

Description	Item number	Compatible with loader
Concrete Pump	7108693	T190-ET320-BS630-ES185-ET190-BS250-BT870-ES850-ES650-ET650-ES205-ES770-ET770-EA770-E

Characteristics and performance

Description	Item number	Hopper capacity (m3)	Vertical pumping height	Horizontal pumping distance	Pumping rate (m3/h)	Flow range [MIN]
Concrete Pump	7108693	0.28	0.0-15.0	0.0-75.0	13.0-23.0	56.0-151.0

Weights and dimensions

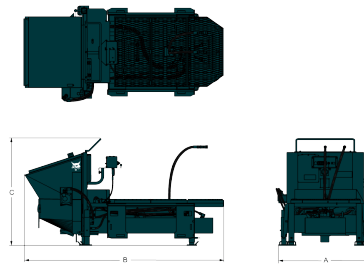

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Concrete Pump	7108693	454.0	454.0	1216.0	2615.0	1406.0