



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



# T20

## HEAVY-DUTY INDUSTRIAL SCRUBBER

- Achieve excellent cleaning results in industrial environments with aggressive scrubbing technologies
- Improve productivity with extended run times, easy brush changes and quick recovery tank draining
- Lower your cost of ownership through innovative engineering that increases productivity and reduces service and maintenance

## EXCELLENT CLEANING RESULTS A LOWER COST OF OWNERSHIP

AT



### DRAMATICALLY LOWER YOUR COST OF OWNERSHIP

Tennant's innovations in hydraulic technology, tank clean-out and engine accessibility reduce service and maintenance costs, and unproductive downtime.


### INCREASE OPERATOR COMFORT AND SAFETY

Set a new standard of safety while minimising the risk of damage to your machine and facility with an ergonomically designed, forward facing operator compartment, heavy-duty frame with Grip-N-Go™ corner rollers, and ec-H2O™ and FaST™ technologies for drier, safer floors.

### IMPROVE YOUR PRODUCTIVITY

Longer run times, easy brush changes and quick recovery tank draining makes the T20 a machine you can depend on every day of the week.

# INSIDE THE T20

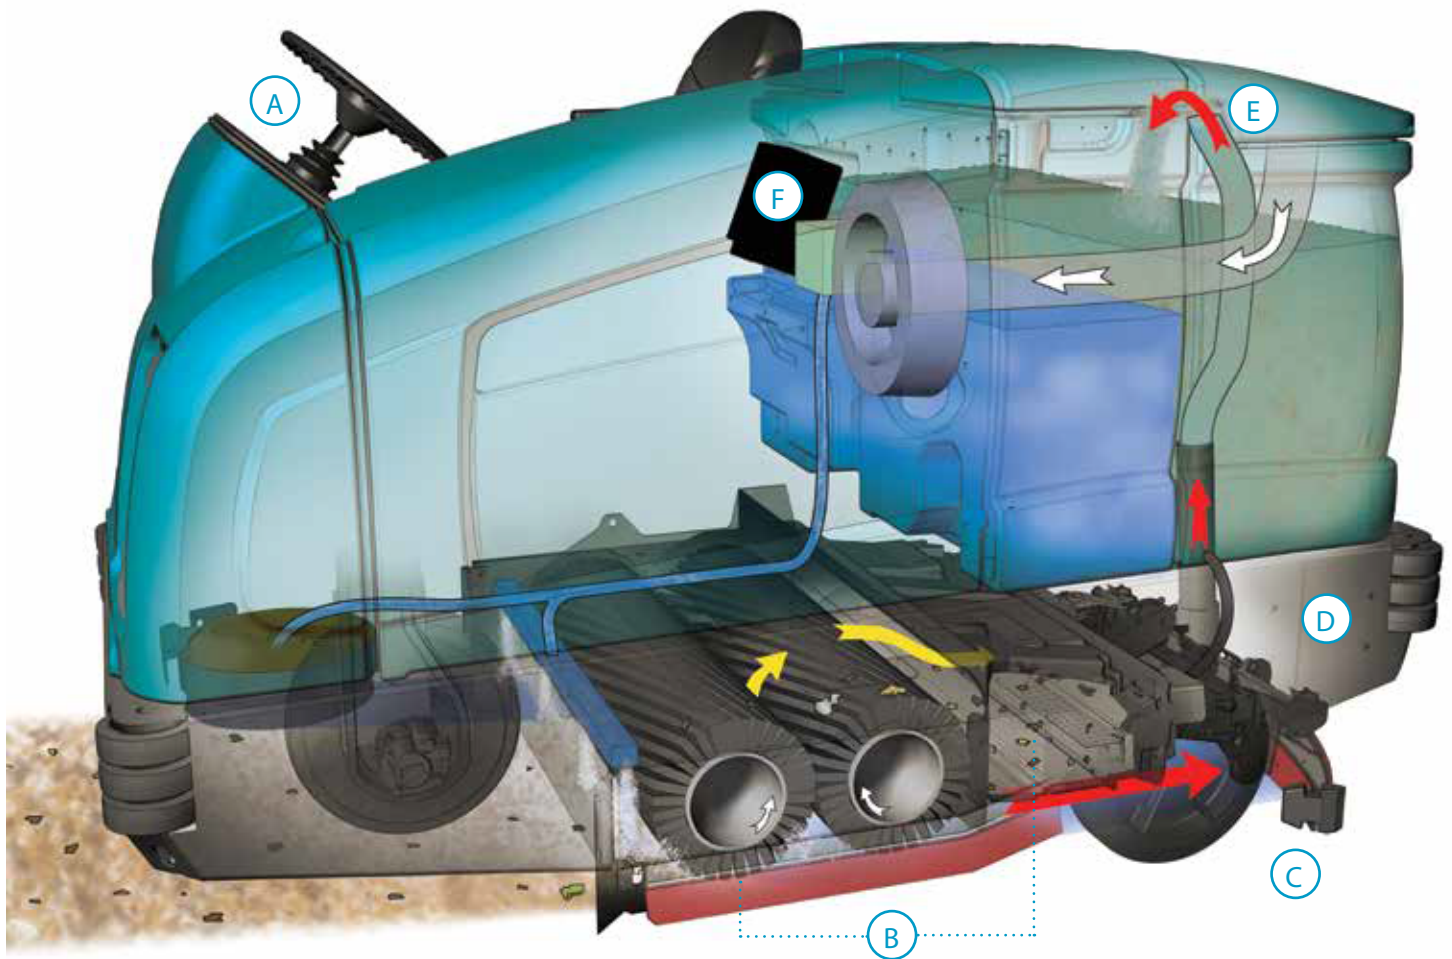

**A** Simplify training with the Touch-N-Go™ Control module featuring 1-step™ scrubbing.

**B** Maximise productivity with cylindrical brushes and EZ-Remove™ debris tray.

**C** Maximise water pick-up and reduce maintenance time with the Dura-Track™ squeegee with SmartRelease™.

**D** Count on durable, steel frame and Grip-N-Go™ corner rollers to withstand the toughest environments and protect your machine and facility.


**E** Quickly and easily clean solution and recovery tanks with easy-access Hygenic™ tanks.

**F** Reduce environmental impact\* with ec-H2O™ or FaST™ technologies.

\* Based on a study by EcoForm™. Visit [www.tennantco.com](http://www.tennantco.com) for more information.



## COST EFFECTIVE AND PRODUCTIVE



BRUSH OPTIONS

Achieve outstanding cleaning results in the harshest industrial environments with dual cylindrical brushes or three gimble mounted disk brushes for aggressive cleaning.



SQUEEGEE PROTECTION KIT

Lower maintenance and repair costs with a heavy-duty rear squeegee protection kit that prevents damage to the machine.



EZ - REMOVE DEBRISTRAY

EZ-Remove™ debris tray glides in and out on wheels, improving productivity and operator safety. The convenient and sturdy handle simplifies debris transport and disposal.



EASY OPEN SERVICE

EasyOpen™ service access allows you to quickly and easily access the internal parts of the machine, reducing service and maintenance costs.



EXCLUSIVETECHNOLOGIES

The T20 is available with additional exclusive technologies FaST® and ES® Extended Scrubbing. These technologies increase scrub time up to three times using a single tank of water.

## T20 HEAVY-DUTY INDUSTRIAL FLOOR SCRUBBER

### SCRUBBING SYSTEM

Cleaning path	
Cylindrical main brushes	1,020 mm
Disk main brushes	1,070 mm
With scrubbing side brush	1,370 mm
With sweeping side brush	1,420 mm

### BRUSH DRIVE SYSTEM

Disk main brushes	
Brush rpm	230 rpm
Down pressure weight (up to)	181 kg
Brush diameter (3)	360 mm
Cylindrical main brushes	
Brush rpm	480 rpm
Down pressure weight (up to)	177 kg
Brush diameter (2)	300 mm
Disk side brush	
Brush rpm	150 rpm
Brush diameter	410 mm
Sweeping brush diameter	530 mm

### SOLUTION DELIVERY SYSTEM

Solution tank capacity	303 L
Solution capacity with ES®	473 L

### RECOVERY SYSTEM

Recovery tank capacity	360 L
Demisting chamber	57 L
Debris tray	
Volume capacity	31 L
Weight capacity	50 kg
Vacuum fan	
Speed	11,000 rpm
Water lift	890 mm

### PROPELLING SYSTEM

Propel speed forward (variable to)	13 km/h
Propel speed reverse (variable to)	6.4 km/h
Engine-petrol/LPG (2.0 L)	37.2 kW
Engine-diesel (1.5 L)	28 kW
Gradeability	
Transport at gross weight	10° / 18%
Working (scrubbing)	8° / 14%
Ground clearance	76 mm

### MACHINE SPECIFICATIONS

Length	2,410 mm
Width	
Frame	1,270 mm
Rear squeegee	1,300 mm
With side brush	1,470 mm
Height	1,470 mm
With overhead guard	2,120 mm
Weight (empty)	1,497 kg
Minimum aisle turn	2,790 mm

### WARRANTY

See your local representative for warranty information.

\*Specifications subject to change without notice.

